


TYPICAL SECTIONS

MAP NO. 1, 2, 3 & 4

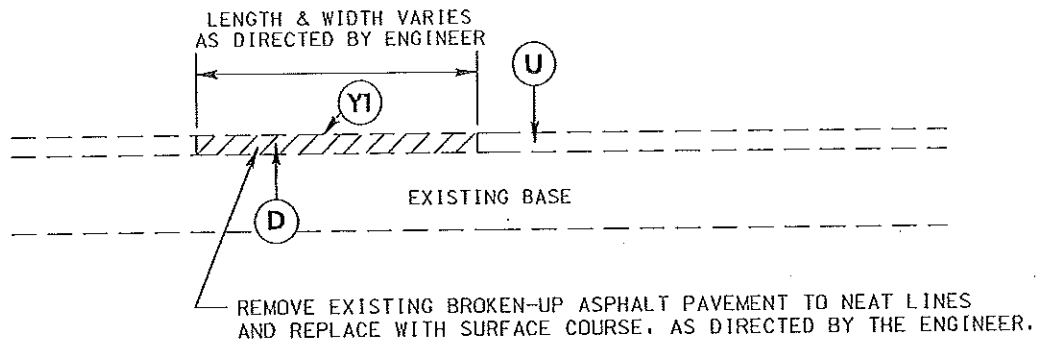


WBS ELEMENTS 3CR.20671.110, 3C.067066, & 40255.3.2

MILL PATCHING

USE ON SR 1117, SR 1229, SR 1302 & SR 1308

TYPICAL SECTION NO. 1

MAP NO. 5

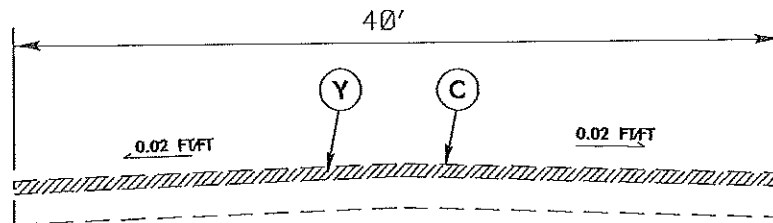

WBS ELEMENT 3CR.20671.110

MILLING AND RESURFACING

USE FOR SR 1308 AT ALLEN'S AUTOMOTIVE

TYPICAL SECTION NO. 2

PAVEMENT SCHEDULE

WBS ELEMENTS: 3.20671.110, 3C.067066 & 40255.3.2

C	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
D	PROP. APPROX. 2½" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
T	EARTH MATERIAL
U	EXISTING PAVEMENT
Y	MILL DEPTH 1½".
Y1	MILL DEPTH 2½".